
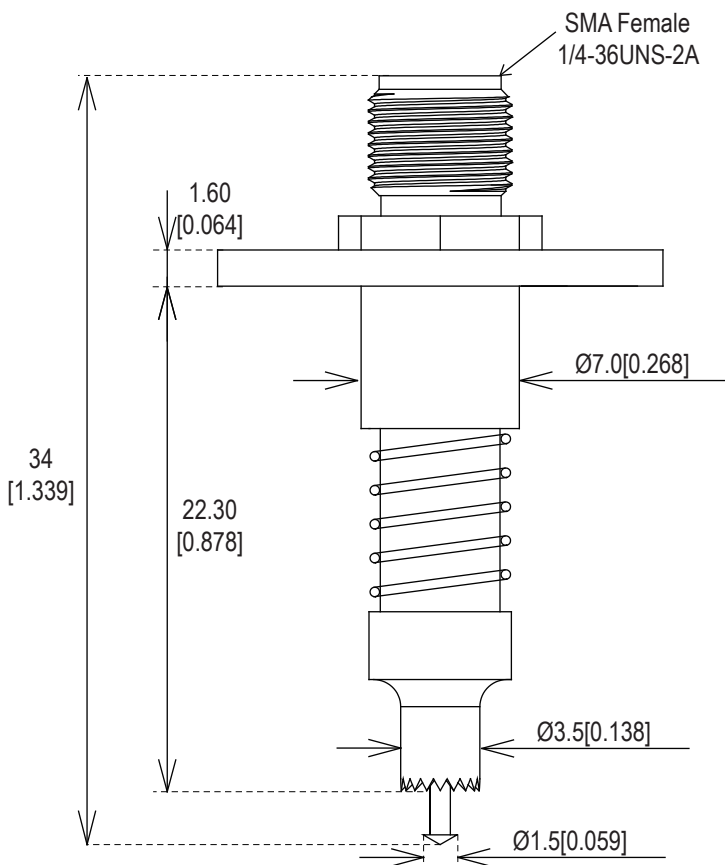



Probe Specification

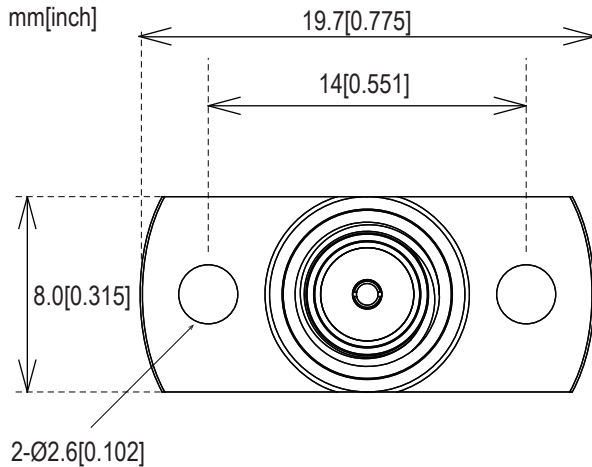

Mechanical& Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	500MΩ@DC100V
V.S.W.R	1.2(DC-6GHz)
Withstanding Voltage	AC300V
Operated Temp.	-40~85°C
Insertion Loss	-0.3dB@3-6GHz
Max Travel	3mm-4mm
Durability	10000Cycles

Probe Image

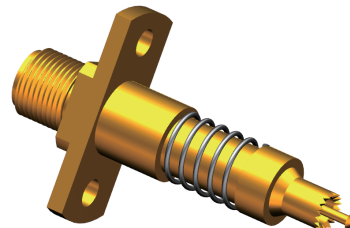

Applications



Applied Coaxial Pad Dimension
 $0.9\text{mm} \leq \text{SPD} \leq 1.2\text{mm}$
 $2.3\text{mm} \leq \text{GID} \leq 2.9\text{mm}$
 $3.9\text{mm} \leq \text{GOD} \leq 4.3\text{mm}$

How To Order RF Test Probe

Part Number: F537-0802

Cable Assembly Part Number:
St316-AMAMRA-100CM