


Probe Specification


mm[inch]

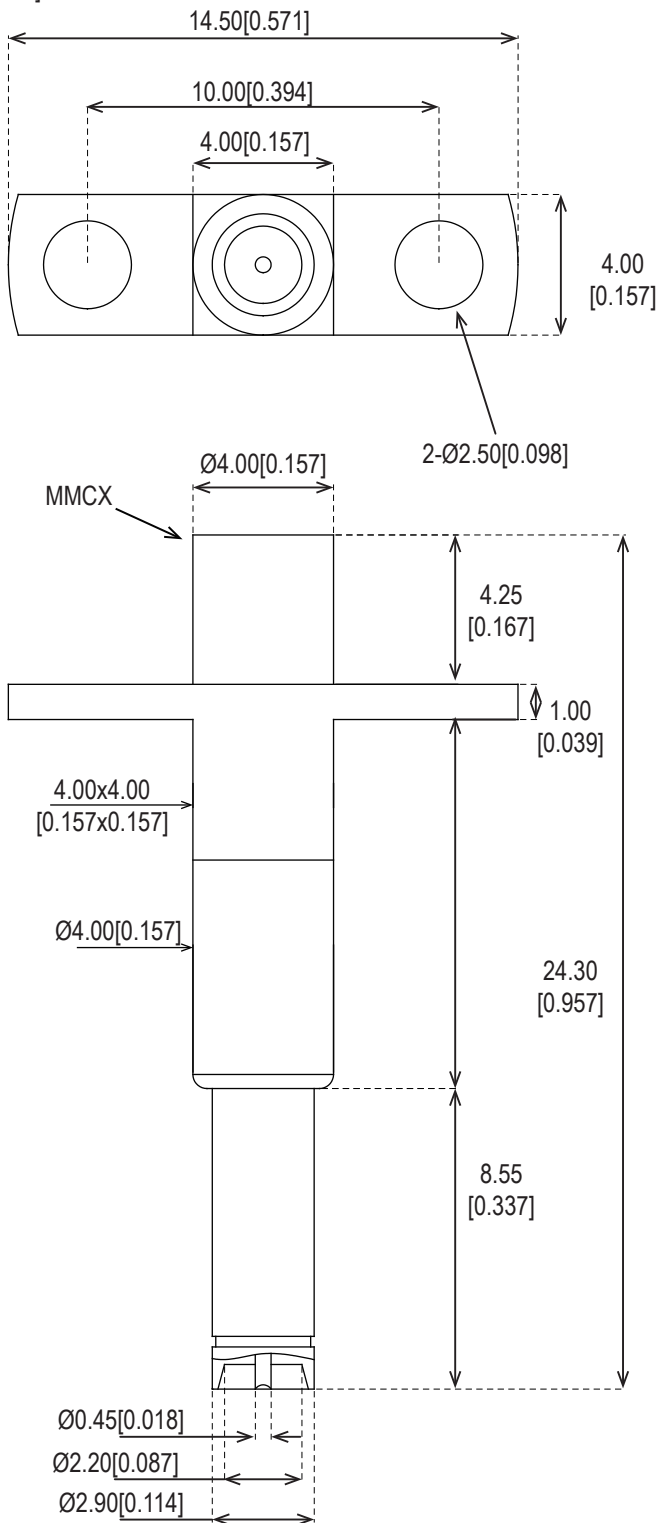

Mechanical & Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	500MΩ@DC100V
V.S.W.R	1.2(DC-6GHz)
Withstanding Voltage	AC300V
Operated Temp.	-27~325°C
Insertion Loss	-0.25dB@3-6GHz
Max Travel	2.05mm
Durability	10000Cycles

Probe Image



Applications

Applicated Connectors

1.MURATA:MM9329-2700

2.HIROSE:U.FL-R-SMT

3.I-PEX:20279-001 E-01 20314-001 E-01

How To Order RF Test Probe

Part Number: F538-0502