


Probe

Y1157-1008-006

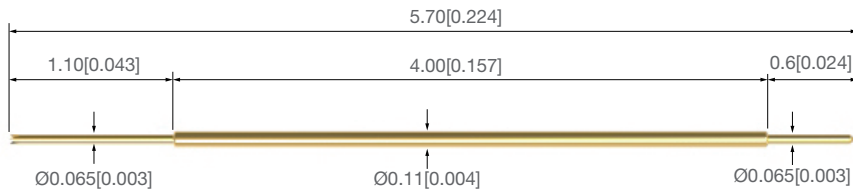


Top Head Tip

Gold Plated



PD Alloy

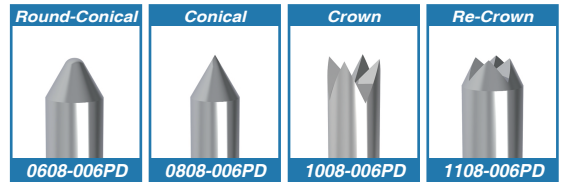

Mechanical& Electrical Specification


Working Stroke	0.60mm[.024in]
Full Stroke	0.80mm[.031in]
Spring Force	6g@0.60mm
Resistance	Max. 200mOhm
Current	0.2Amp
Operated Temp.	-40~125°C

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated


Probe

J15522-0906-008

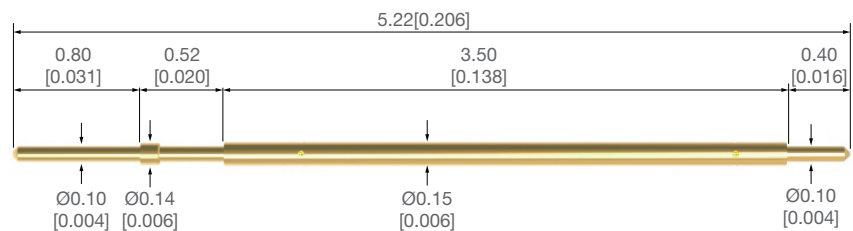


Top Head Tip

Gold Plated

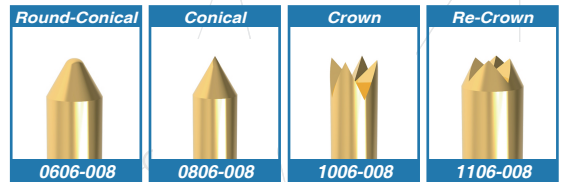

PD Alloy

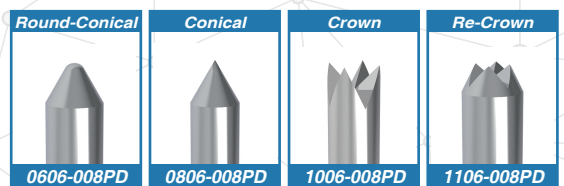

Mechanical& Electrical Specification

Working Stroke	0.40mm[.016in]
Full Stroke	0.80mm[.031in]
Spring Force	8g@0.40mm
Resistance	Max. 200mOhm
Current	0.3Amp
Operated Temp.	-40~125°C

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated