


Probe Specification

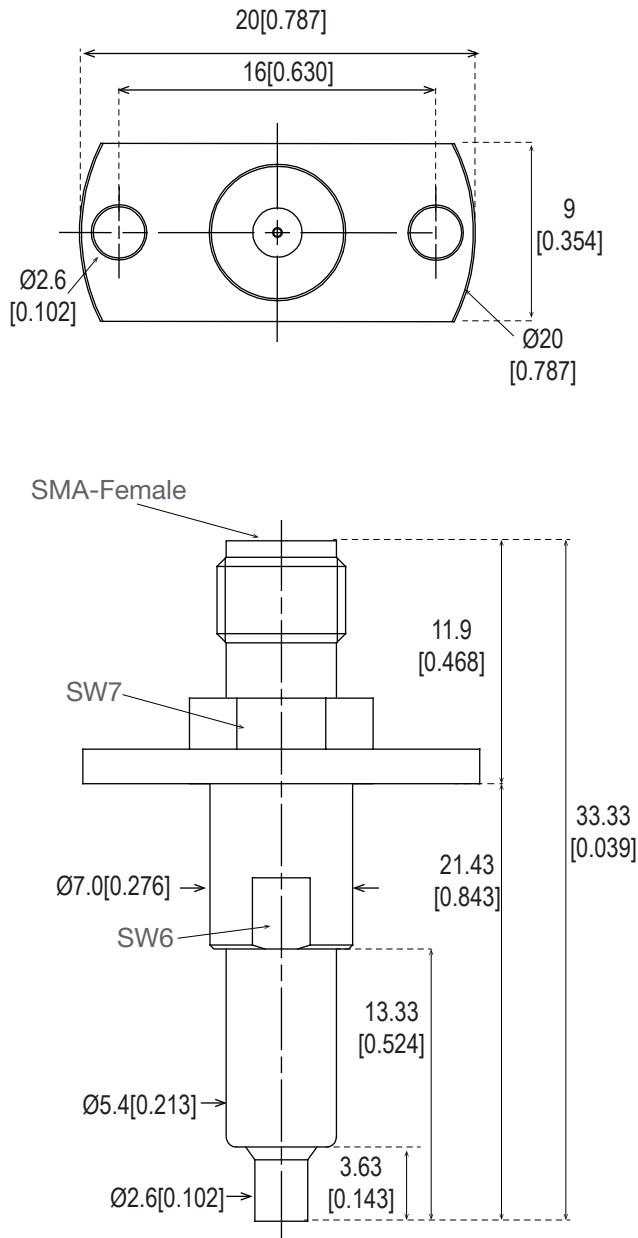


Mechanical& Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	1000MΩ
V.S.W.R	1.5(DC-6GHz)
Withstanding Voltage	AC250V
Operated Temp.	-40~85°C
Insertion Loss	0.5dB
Max Travel	200g@1.4mm
Durability	10000Cycles

Probe Image




Applications



Test Connectors
Murata:MM8030-
2600/2610
ECT:ECT818000291

Replace MM126310



How To Order

RF Probe Part Number: F310-0502

Cable Assembly Part Number:
St316-AMRAAM-100CM