
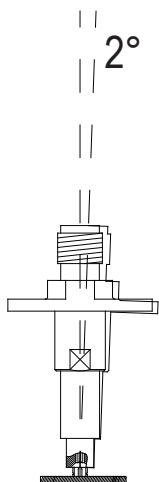
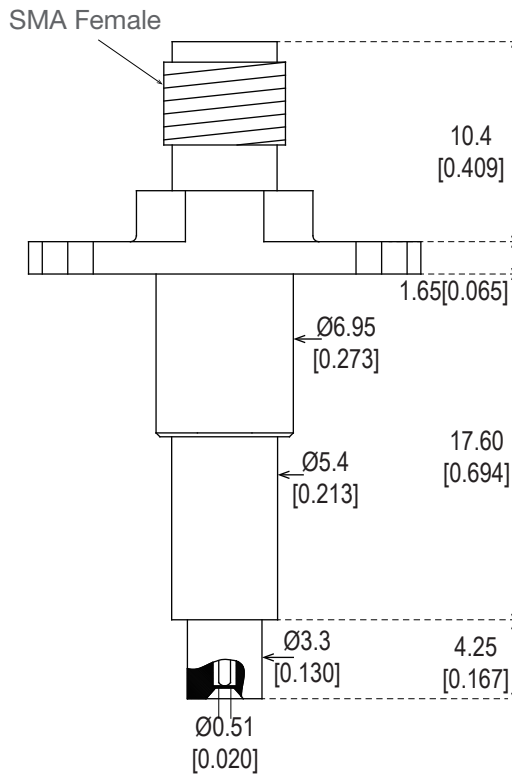


Probe Specification

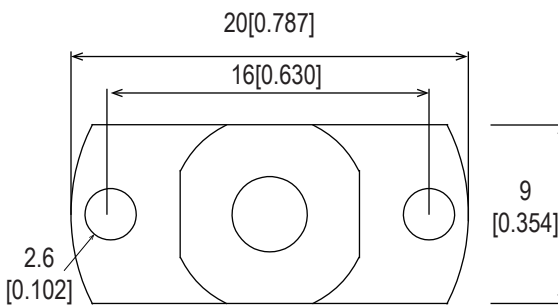


Mechanical& Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	1000MΩ
V.S.W.R	1.5(DC-6GHz)
Withstanding Voltage	AC250V
Operated Temp.	-40~85°C
Insertion Loss	0.8dB
Max Travel	3.0mm
Durability	10000Cycles

Probe Image



Applications

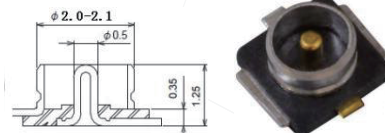

Test on Connectors
Murata:MM9329-2700
Hirose:U.FL-R-SMT
ECT:ECT818000117

How To Order RF Test Probe

Part Number: F330-0702

Cable Assembly Part Number:
St316-AMRAAM-100CM