
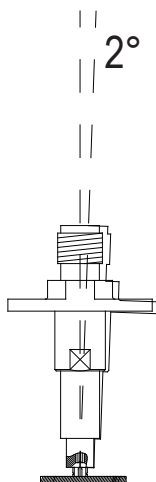
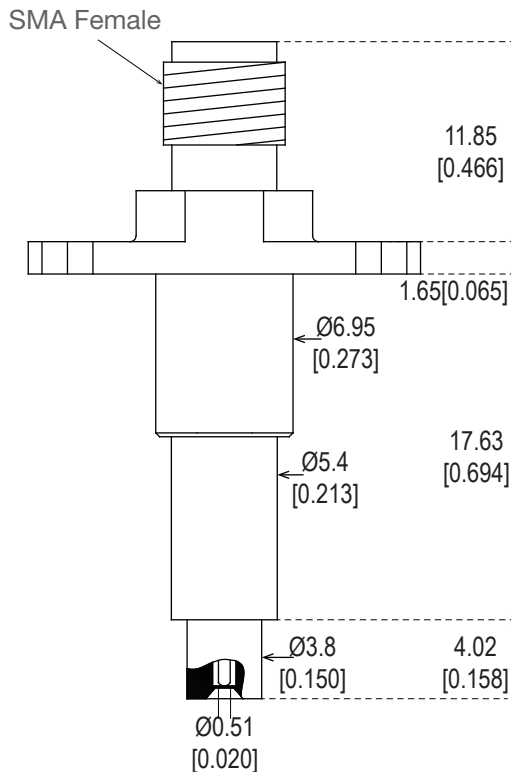


Probe Specification

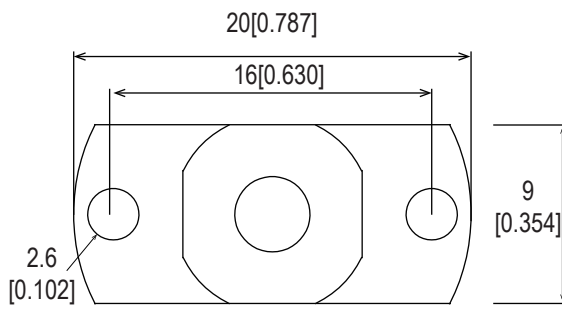

Mechanical& Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	500MΩ
V.S.W.R	1.3(DC-3GHz)/1.7(3-6GHz)
Withstanding Voltage	AC300V
Operated Temp.	-40~85°C
Installation Hole	7.0mm
Max Travel	3.0mm
Durability	10000Cycles

Probe Image



Applications



Test on Connectors
Murata:MM8430-2610 MM8130-2600
Hirose:MS-156NB
ECT:ECT818000001

How To Order RF Test Probe

Part Number: F360-1002

Cable Assembly Part Number:
St316-AMRAAM-100CM