



Probe Specification

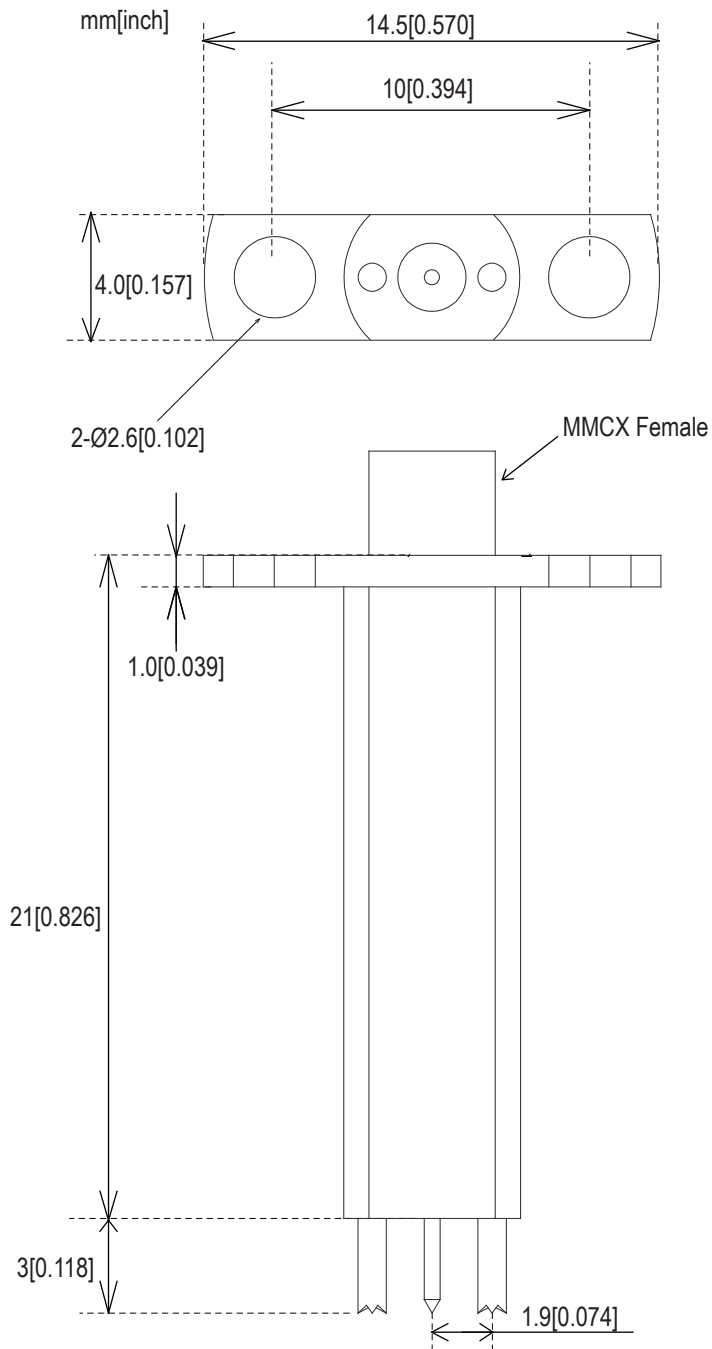


Mechanical & Electrical Specification

Voltage Rating	250Vrms Max
Frequency	DC-6GHz
Impedance	50Ω
Insulation Resistance	500MΩ@DC100V
V.S.W.R	1.2(DC-3GHz) 1.4(3-6GHz)
Withstanding Voltage	AC300V
Operated Temp.	-40~85°C
Insertion Loss	-0.25dB@6GHz
Max Travel	3.0mm
Durability	10000Cycles

Probe Image



Applications

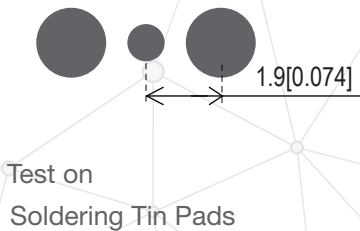

How To Order RF Test Probe

Part Number: F421-0810-P3

Cable Assembly Part Number:
StF086-AFX2MRA-9CM