


Probe

J20375-3005-008PD

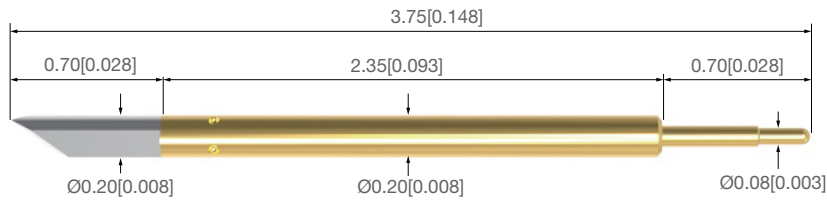

Top Head Tip

PD Alloy

Round-Conical



3005-008PD

Mechanical& Electrical Specification


Working Stroke	0.45mm[.018in]
Full Stroke	0.60mm[.024in]
Spring Force	8g@0.45mm
Resistance	Max. 100mOhm
Current	1.0Amp
Bandwidth	/
Operated Temp.	-50~150°C

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

J20384-3006-008PD

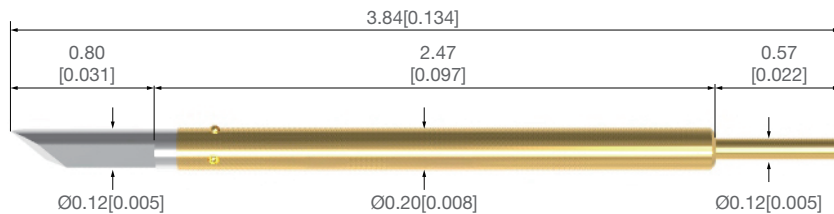

Top Head Tip

PD Alloy

Round-Conical



3006-008PD

Mechanical& Electrical Specification

Working Stroke	0.40mm[.016in]
Full Stroke	0.50mm[.031in]
Spring Force	16g@0.40mm
Resistance	Max. 100mOhm
Current	1.5Amp
Operated Temp.	-50~150°C

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated