


Probe

J2159-1006-011

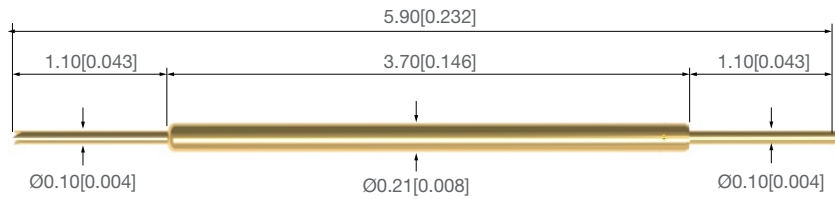

Mechanical& Electrical Specification


Working Stroke	0.60mm[.024in]
Full Stroke	1.00mm[.039in]
Spring Force	11g@0.60mm
Resistance	Max. 80mOhm
Current	0.5Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

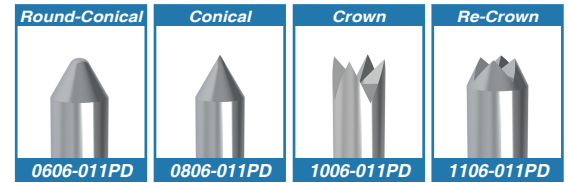


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

JR2335-1106-020PD

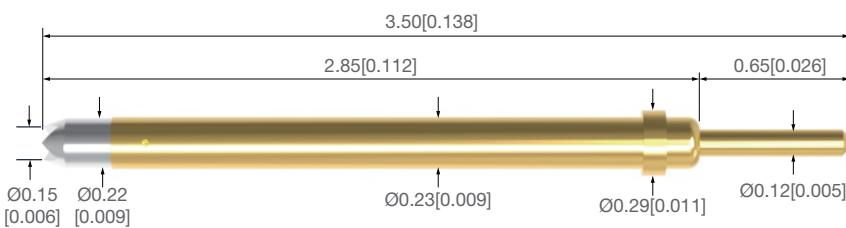

Mechanical& Electrical Specification


Working Stroke	0.40mm[.016in]
Full Stroke	0.50mm[.020in]
Full Stroke	20g@0.40mm
Resistance	Max. 60mOhm
Current	0.50Amp
Bandwidth	/
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

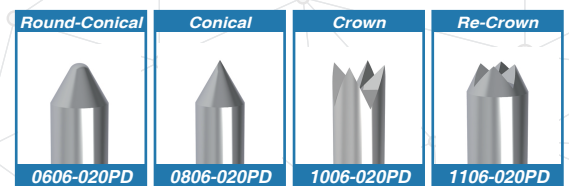

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated