


Probe

J3132-1105-036

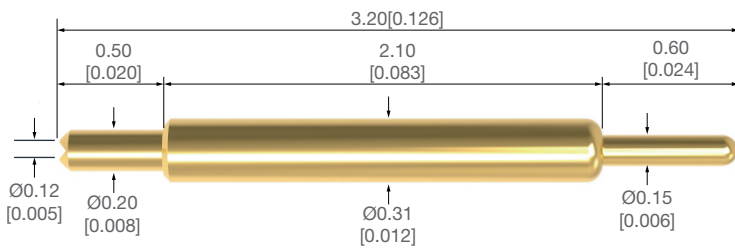

Mechanical& Electrical Specification


Working Stroke	0.40mm[.016in]
Full Stroke	0.55mm[.022in]
Spring Force	36g@0.40mm
Resistance	Max. 80mOhm
Current	2Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

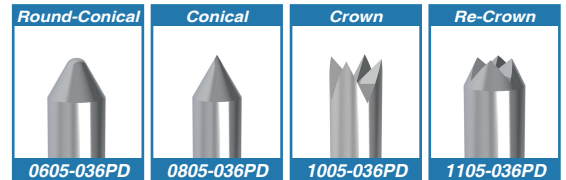


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y3133-1010-025

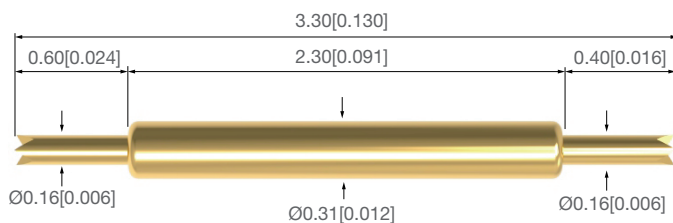


Mechanical& Electrical Specification


Working Stroke	0.50mm[.020in]
Full Stroke	0.65mm[.026in]
Spring Force	25g@0.50mm
Resistance	Max. 150mOhm
Current	1.0Amp
Bandwidth	-1dB@27.9GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

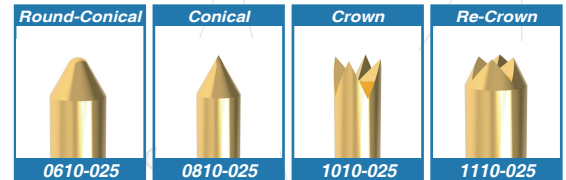

PD Alloy

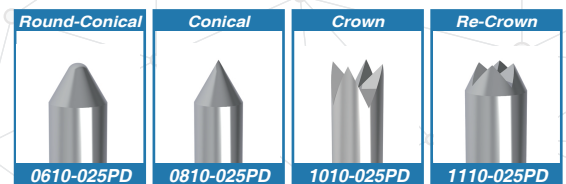

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated