


JR2533

Pitch 0.40mm[0.016inch]

Probe

JR2533-1106-020

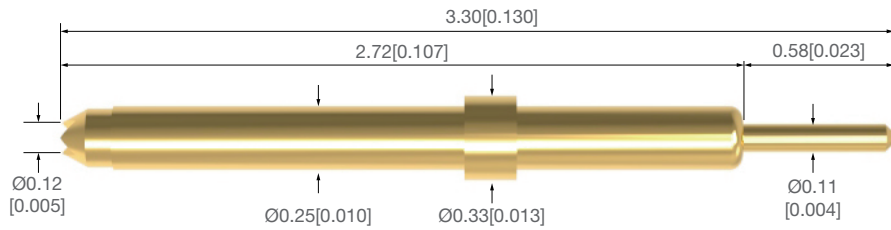


Mechanical& Electrical Specification


Working Stroke	0.40mm[.016in]
Full Stroke	0.50mm[.020in]
Spring Force	20g@0.40mm
Resistance	Max. 80mOhm
Current	1.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

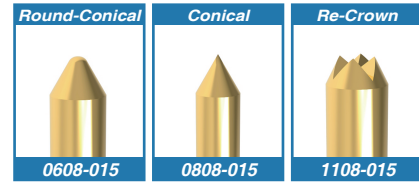

PD Alloy

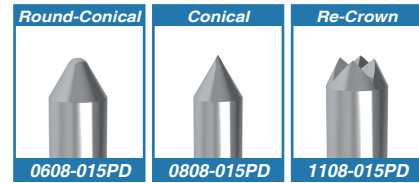

Materials


Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

JR2620

Pitch 0.40mm[0.016inch]

Probe

JR2620-0605-023

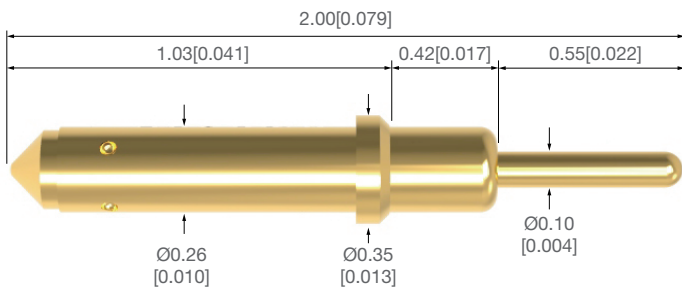


Mechanical& Electrical Specification


Working Stroke	0.40mm[.015in]
Full Stroke	0.55mm[.021in]
Spring Force	23g@0.40mm
Resistance	Max.100mOhm
Current	1Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

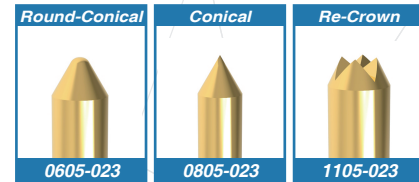

PD Alloy

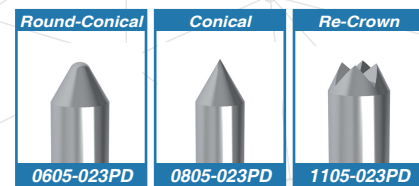

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

JIANYANG[®]
Contact Solutions

JIANYANG | sales@jyprobe.com | +8621-3769-5886 | www.jyprobe.com

BGA TEST

48