


Probe

JR2682-0505-020

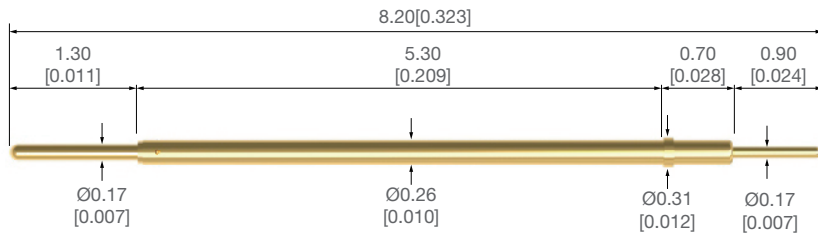


Mechanical& Electrical Specification


Working Stroke	0.70mm[.026in]
Full Stroke	0.90mm[.031in]
Spring Force	20g@0.70mm
Resistance	Max. 80mOhm
Current	1Amp
Operated Temp.	-55~120°C

Top Head Tip

Gold Plated

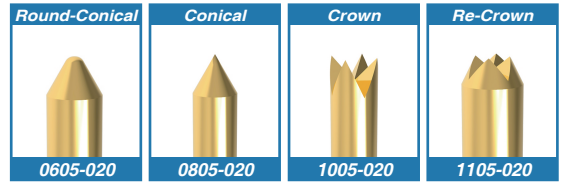

PD Alloy

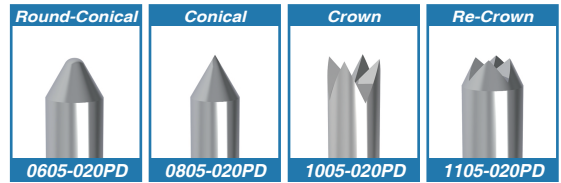


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y26123-0808-015

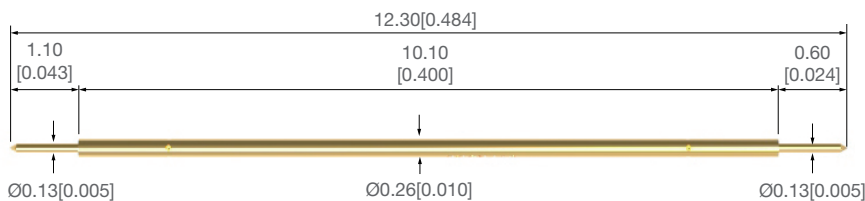

Mechanical& Electrical Specification


Working Stroke	1.20mm[.047in]
Full Stroke	1.80mm[.071in]
Spring Force	15g@1.20mm
Resistance	Max.300mOhm
Current	1Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

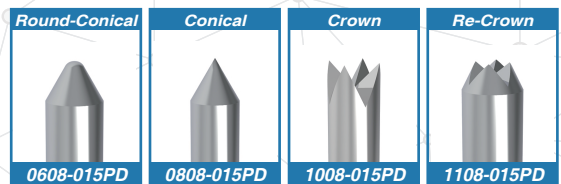

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated