


JS050


1.27mm [.050in] Pitch
4.25mm [.167in] Travel

Probe& Receptacles

JS050

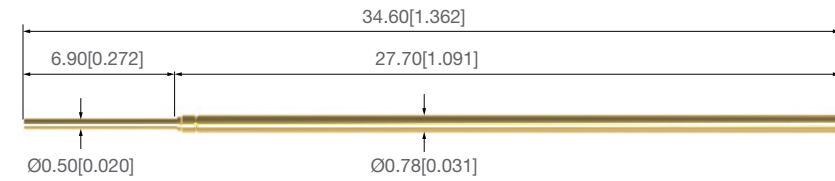


R050-05

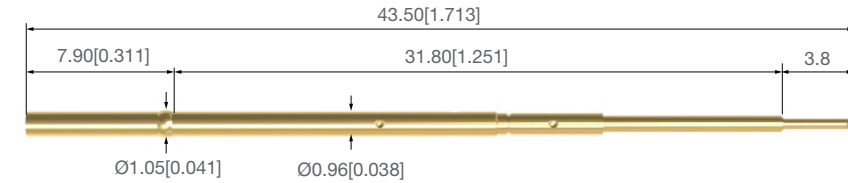

Mechanical& Electrical Specification

Working Stroke	4.25mm[0.167in]
Full Stroke	6.35mm[0.250in]
Spring Force	1N 2N
Resistance	Max.50mOhm
Current	3Amp
Operated Temp.	-40~125°C

Tips Style& Code

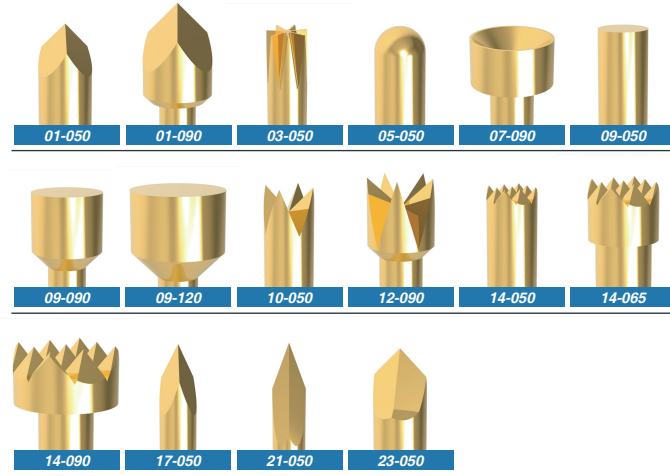

Materials


Plunger	SK4, BeCu/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

JA050


1.27mm [.050in] Pitch
4.25mm [.167in] Travel

Probe& Receptacles

JA050

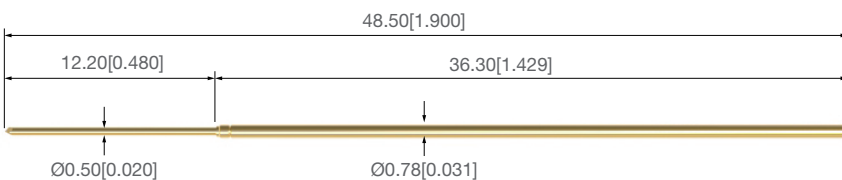


R050-01

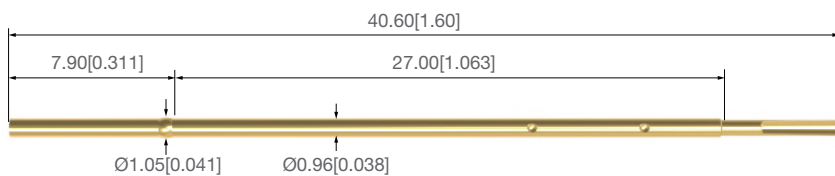

Mechanical& Electrical Specification

Working Stroke	8.00mm[0.315in]
Full Stroke	10.00mm[0.394in]
Spring Force	1N 2N
Resistance	Max.50mOhm
Current	3Amp
Operated Temp.	-40~125°C

Tips Style& Code

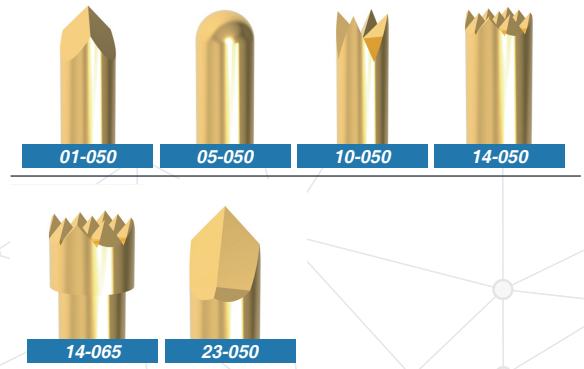

Materials

Plunger	SK4, BeCu/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated