


JS075


1.91mm [.075in] Pitch
4.25mm [.167in] Travel

Probe & Receptacle

JS075

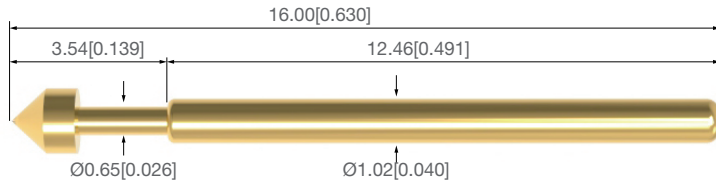


RS075-01

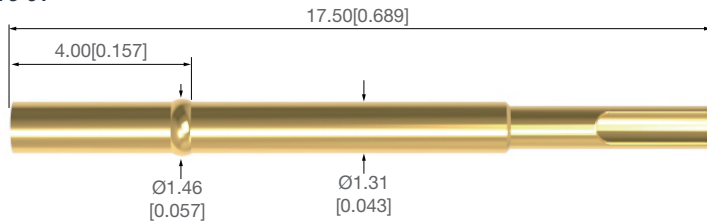

Mechanical & Electrical Specification

Working Stroke	1.36mm [0.053in]
Full Stroke	2.04mm [0.080in]
Spring Force	1N 2N
Resistance	Max.20mOhm
Current	3Amp
Operated Temp.	-40~125°C

Tips Style & Code

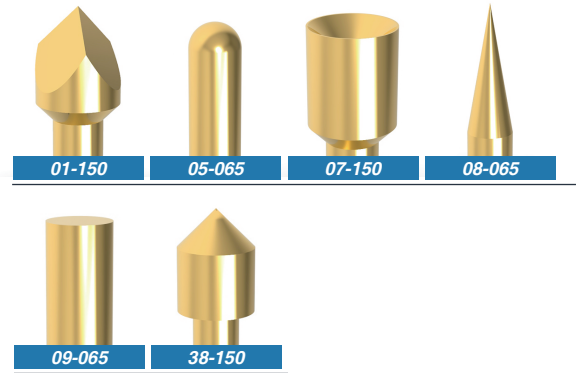

Materials


Plunger	SK4, BeCu/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

JA075


1.91mm [.075in] Pitch
4.25mm [.167in] Travel

Probe & Receptacle

JA075

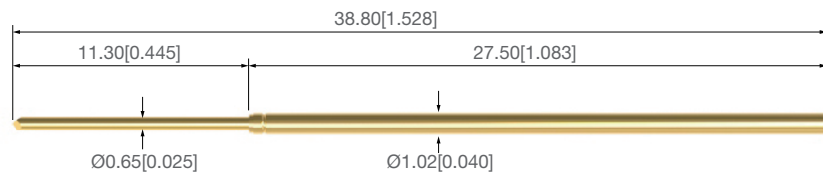


R075-01

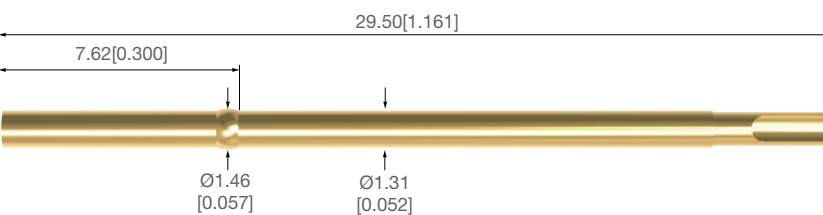

Mechanical & Electrical Specification

Working Stroke	9.00mm [0.354in]
Full Stroke	11.00mm [0.433in]
Spring Force	1N 2N
Resistance	Max.50mOhm
Current	3Amp
Operated Temp.	-40~125°C

Tips Style & Code

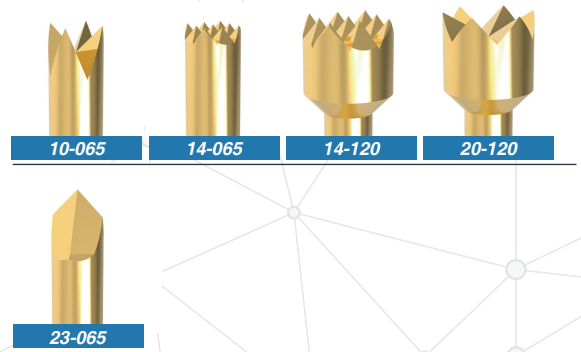

Materials

Plunger	SK4, BeCu/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated