


Probe

Y2037-0808-017

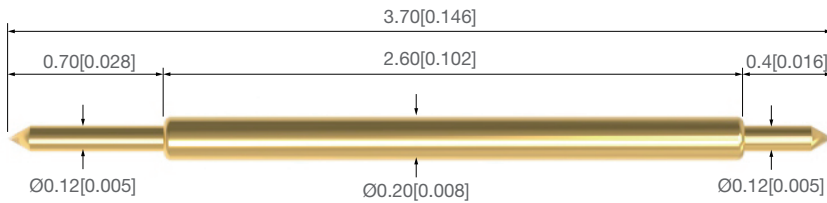

Mechanical& Electrical Specification


Working Stroke	0.40mm[.016in]
Full Stroke	0.55mm[.022in]
Spring Force	17g@0.40mm
Resistance	Max. 100mOhm
Current	0.8Amp
Bandwidth	/
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

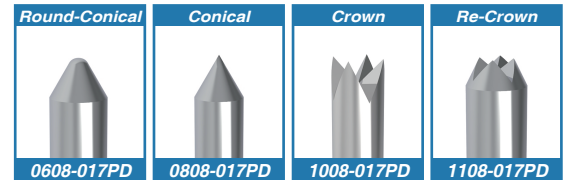


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y2057-0808-017

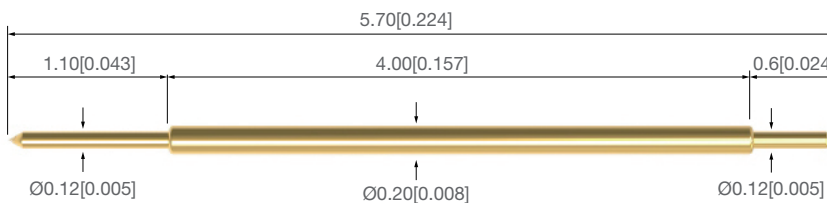

Mechanical& Electrical Specification


Working Stroke	0.65mm[.016in]
Full Stroke	1.00mm[.022in]
Spring Force	17g@0.65mm
Resistance	Max. 200mOhm
Current	0.8Amp
Bandwidth	-1dB@13.1GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

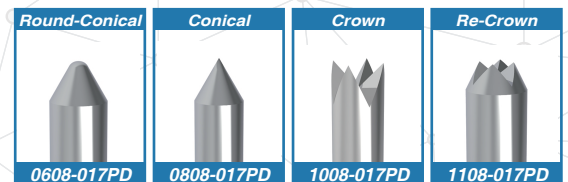

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated