


Probe

Y2357-0610-015

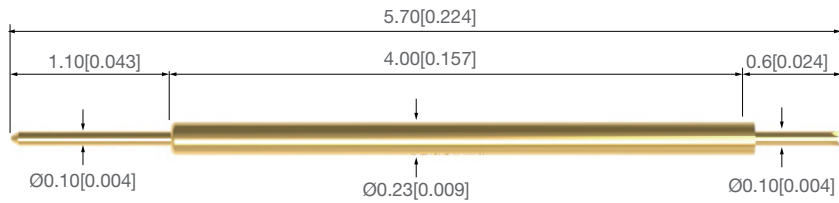


Mechanical& Electrical Specification


Working Stroke	0.65mm[.026in]
Full Stroke	0.80mm[.031in]
Spring Force	15g@0.65mm
Resistance	Max. 200mOhm
Current	0.5Amp
Bandwidth	-1dB@6.48GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

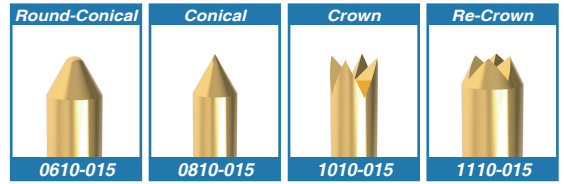

PD Alloy

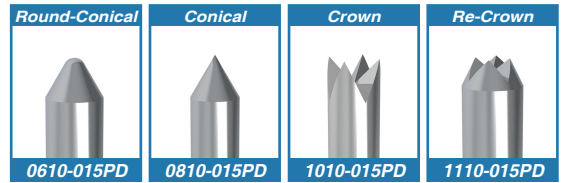


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

J2465-0606-025PD

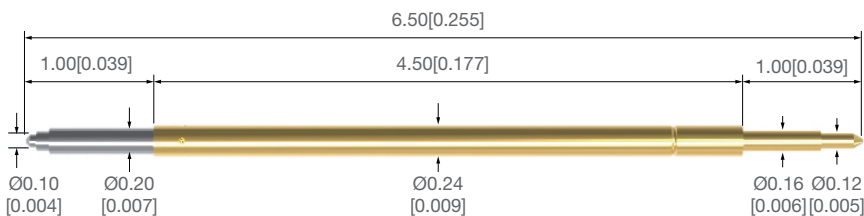


Mechanical& Electrical Specification

Working Stroke	0.40mm[.016in]
Full Stroke	0.60mm[.024in]
Spring Force	25g@0.40mm
Resistance	Max. 80mOhm
Current	1Amp
Operated Temp.	-40~125°C

Top Head Tip

PD Alloy

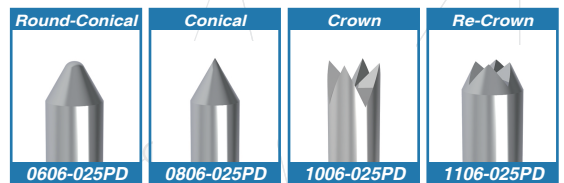

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated