


Probe

Y2861-0805-020

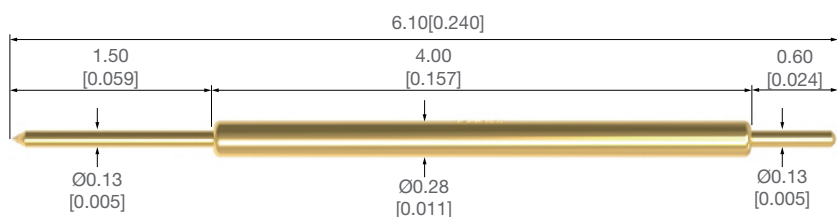

参数 Mechanical& Electrical Specification

Working Stroke	0.90mm[.035in]
Full Stroke	1.10mm[.043in]
Spring Force	20g@0.90mm
Resistance	Max. 150mOhm
Current	1Amp
Bandwidth	-1dB@13.1GHz
Operated Temp.	-40~125°C

Top Head Tip


Gold Plated

Round-Conical

Conical

Crown

Re-Crown



0805-020



0805-020



1005-020



1105-020

PD Alloy

Round-Conical

Conical

Crown

Re-Crown



0605-020PD



0805-020PD



1005-020PD




1105-020PD

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

J3038-3005-040PD

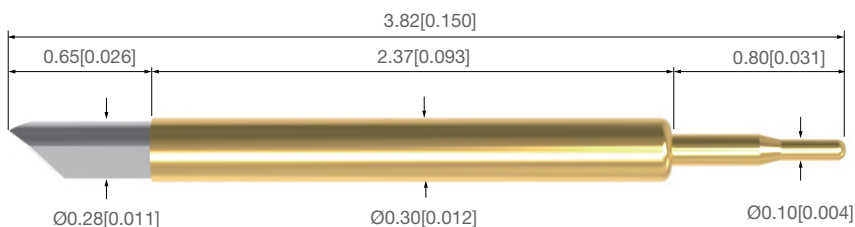


Mechanical& Electrical Specification

Working Stroke	0.60mm[.016in]
Full Stroke	0.70mm[.026in]
Spring Force	40g@0.60mm
Resistance	Max.90mOhm
Current	1.5Amp
Operated Temp.	-40~125°C

Top Head Tip

PD Alloy

Round-Conical



3005-040PD

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated