


Probe

Y3157-1005-019

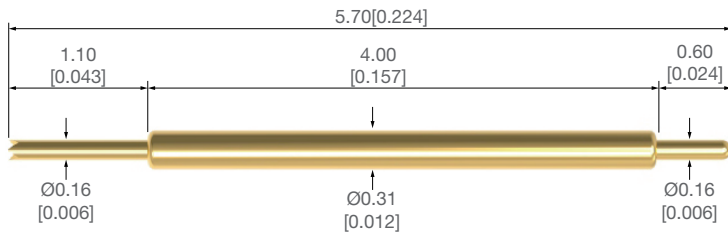

Mechanical& Electrical Specification


Working Stroke	0.65mm[.016in]
Full Stroke	1.10mm[.022in]
Spring Force	20g@0.65mm
Resistance	Max. 150mOhm
Current	1Amp
Bandwidth	-1dB@13.1GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

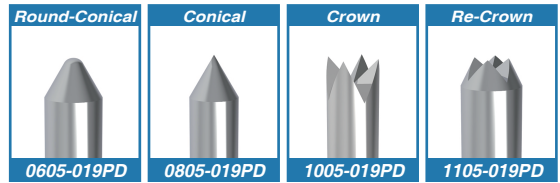


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

J32698-1105-026

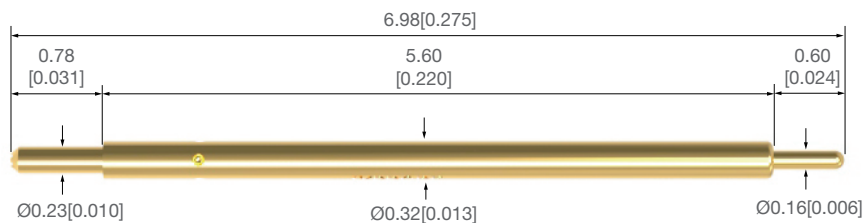

Mechanical& Electrical Specification


Working Stroke	0.51mm[.026in]
Full Stroke	0.60mm[.031in]
Spring Force	26g@0.51mm
Resistance	Max.100mOhm
Current	2.0Amp
Bandwidth	-1dB@26.0GHz
Operated Temp.	-45~125°C

Top Head Tip

Gold Plated



PD Alloy

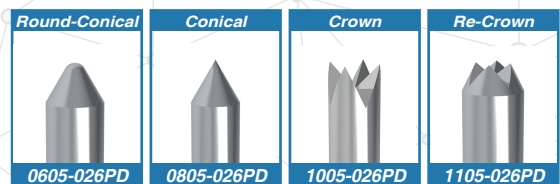

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated