


Probe

Y38115-1006-015

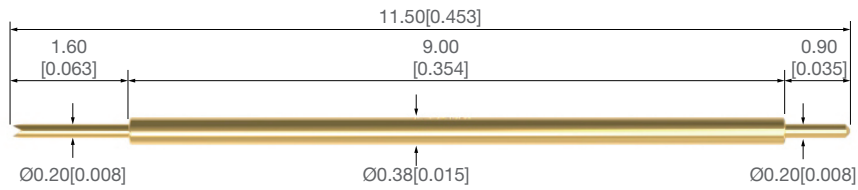


Mechanical& Electrical Specification


Working Stroke	1.00mm[.039in]
Full Stroke	2.00mm[.079in]
Spring Force	15g@1.00mm
Resistance	Max. 150mOhm
Current	1.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

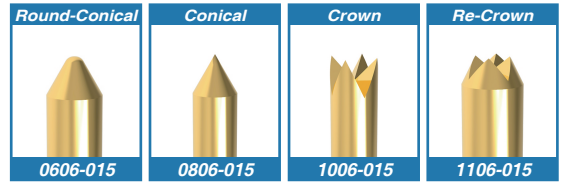

PD Alloy

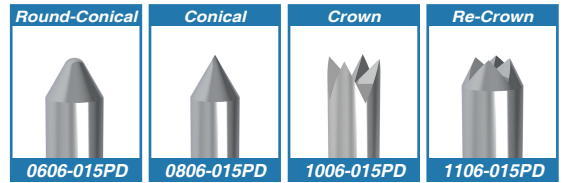


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y4526-1706-080

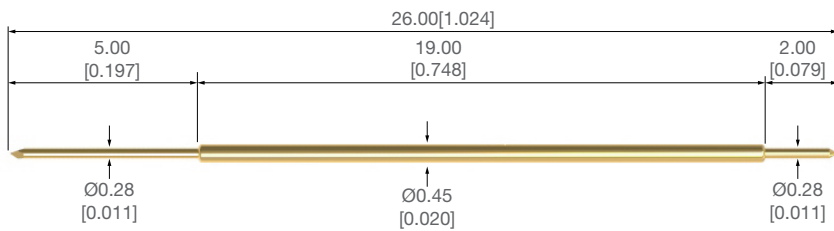


Mechanical& Electrical Specification


Working Stroke	3.50mm[.138in]
Full Stroke	4.20mm[.165in]
Spring Force	80g@0.30mm
Resistance	Max. 100mOhm
Current	3.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

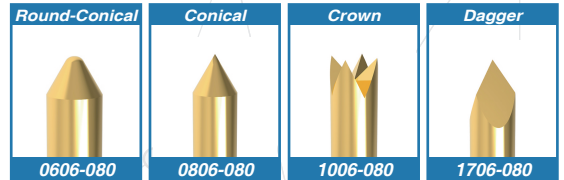

PD Alloy

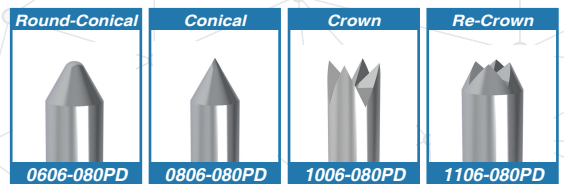

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated