


Probe

Y3857-1006-030

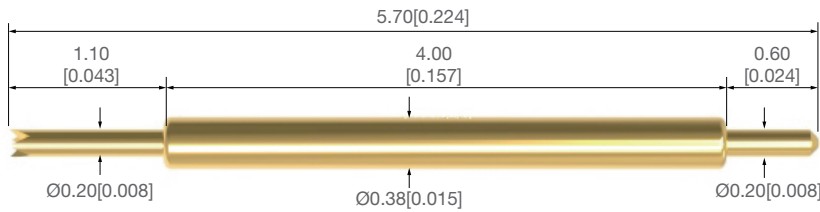

Mechanical& Electrical Specification


Working Stroke	0.65mm[.026in]
Full Stroke	1.10mm[.043in]
Spring Force	30g@0.65mm
Resistance	Max. 100mOhm
Current	1.60Amp
Bandwidth	-1dB@8.3GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

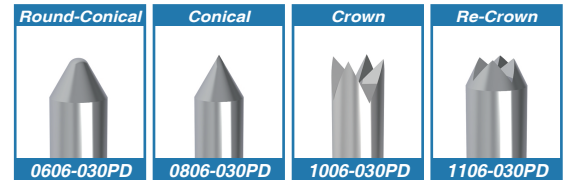


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y38885-1010-035

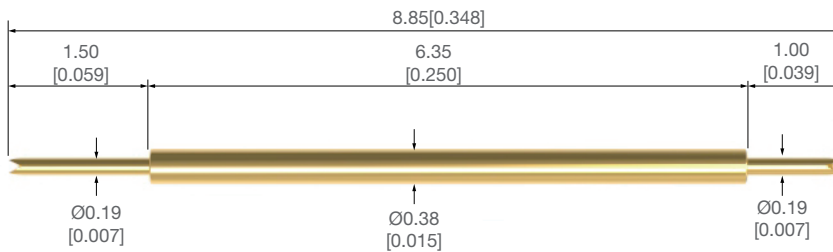


Mechanical& Electrical Specification


Working Stroke	0.70mm[.028in]
Full Stroke	1.50mm[.059in]
Spring Force	35g@0.70mm
Resistance	Max. 100mOhm
Current	2.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

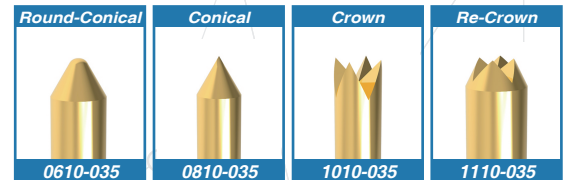

PD Alloy

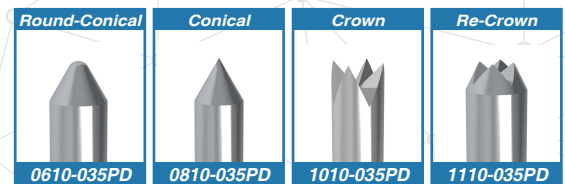

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated