


Probe

Y4857-1005-028

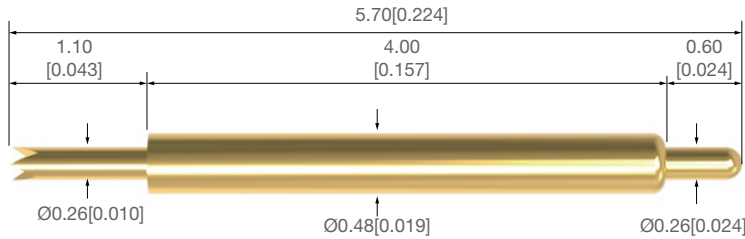


Mechanical& Electrical Specification


Working Stroke	0.65mm[.026in]
Full Stroke	1.10mm[.043in]
Spring Force	28g@0.65mm
Resistance	Max. 80mOhm
Current	1.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

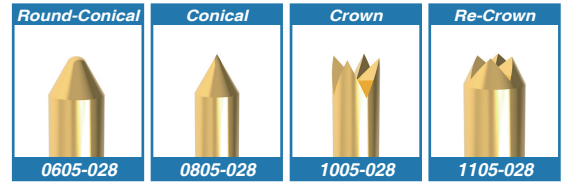

PD Alloy

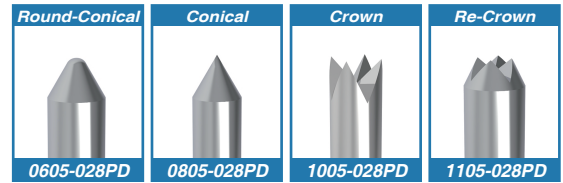


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

J5136-0905-030

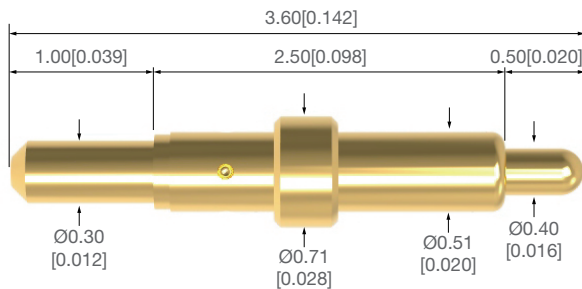


Mechanical& Electrical Specification


Working Stroke	0.30mm[.026in]
Full Stroke	0.50mm[.031in]
Spring Force	30g@0.30mm
Resistance	Max. 30mOhm
Current	3.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

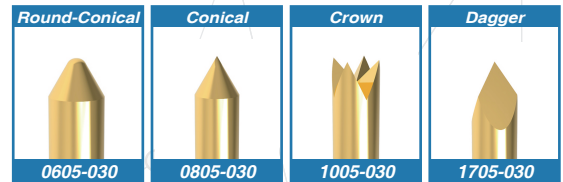

PD Alloy

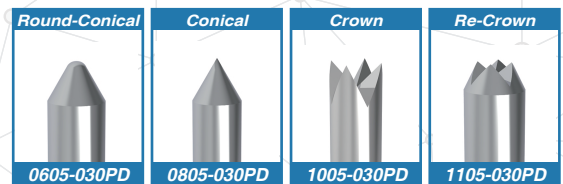

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated