


Probe

Y7826-0505-070

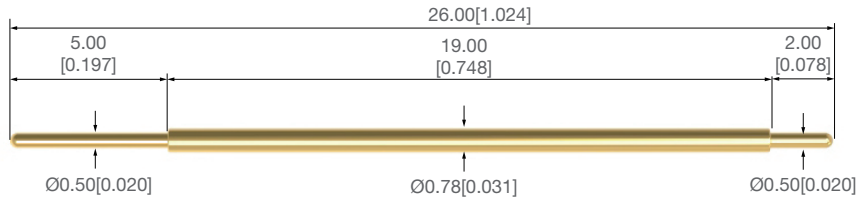

Mechanical& Electrical Specification


Working Stroke	3.50mm[.138in]
Full Stroke	5.00mm[.197in]
Spring Force	70g@3.50mm
Resistance	Max. 100mOhm
Current	3.00Amp
Bandwidth	-1dB@8.3GHz
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated



PD Alloy

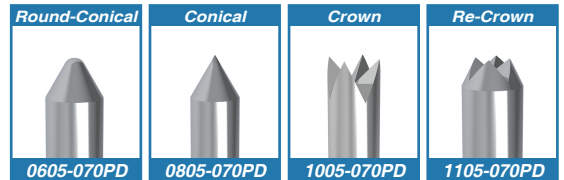


Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated

Probe

Y8316-1105-030

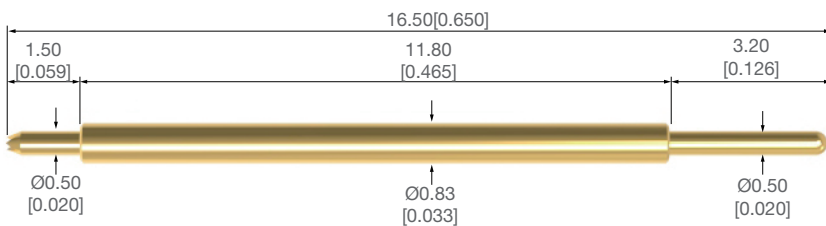


Mechanical& Electrical Specification


Working Stroke	2.50mm[.098in]
Full Stroke	3.50mm[.138in]
Spring Force	30g@2.50mm
Resistance	Max. 100mOhm
Current	2.00Amp
Operated Temp.	-40~125°C

Top Head Tip

Gold Plated

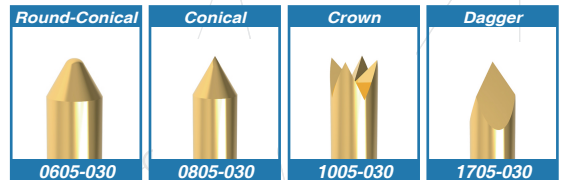

PD Alloy

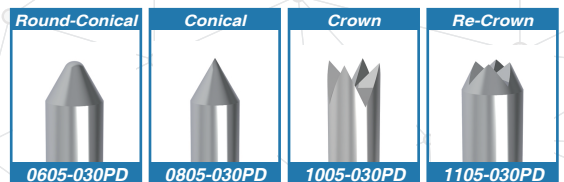

Materials

Top Plunger	BeCu/ SK4/ PD
Bottom Plunger	SK4/ Au-Plated
Spring	Music Wire/ Au-Plated
Tube	Bronze/ Au Plated